



## Central Office Application

# Termination Unit FDU Series

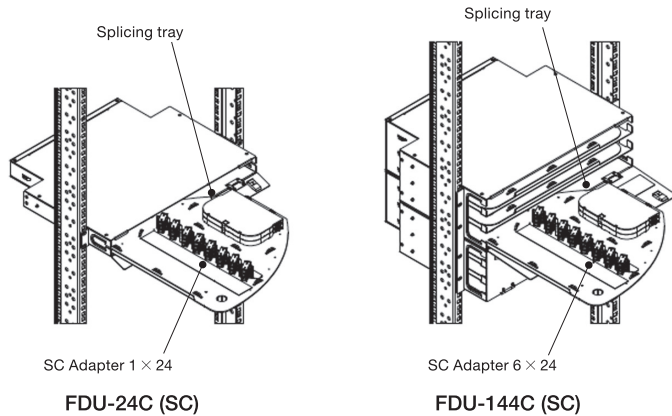

## Features & Benefits

- Compatible with 19-inch standard rack
- Efficient termination and neat maintenance of fiber termination
- Easy maintenance

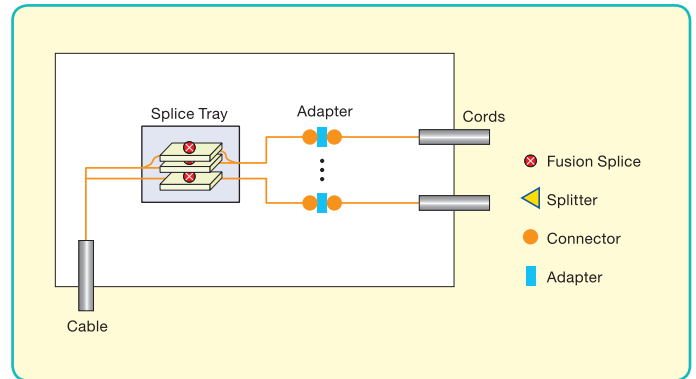

## Applications

- Central office, data center applications
- Indoor fiber management

## Specifications

Item	FDU-24C (SC)	FDU-48C (SC)	FDU-72C (SC)	FDU-96C (SC)	FDU-144C (SC)	
Rack Unit Height	1U	2U	3U	4U	6U	
Number of SC Adapter (pcs)	24	48	72	96	144	
Number of Splice Tray (12 splices/tray) (pcs)	2	4	6	8	12	
Operating Temperature	Up to 65°C (without condensation)					
Dimensions	H (mm)	43.6	88.1	132.6	176.9	265.9
	W × D (mm)	W482.6 × D360				
Weight (Kg)	4	5	7	10	14	
Color	Light Gray					

\* Please contact us for SC/APC type

## Ordering Information

#	Model #	Description
1	FDU-24C (SC)	Termination unit, SC adapter 24pcs, SC pigtail 24pcs, fuse sleeve 24pcs, accessory kit, assembly manual
2	FDU-48C (SC)	Termination unit, SC adapter 48pcs, SC pigtail 48pcs, fuse sleeve 48pcs, accessory kit, assembly manual
3	FDU-72C (SC)	Termination unit, SC adapter 72pcs, SC pigtail 72pcs, fuse sleeve 72pcs, accessory kit, assembly manual
4	FDU-96C (SC)	Termination unit, SC adapter 96pcs, SC pigtail 96pcs, fuse sleeve 96pcs, accessory kit, assembly manual
5	FDU-144C (SC)	Termination unit, SC adapter 144pcs, SC pigtail 144pcs, fuse sleeve 144pcs, accessory kit, assembly manual

## Notes