


DRY CORE INDOOR CABLE

Application

:This type of copper telecommunication cable is aimed to be used for Indoor and Local Area Network applications.

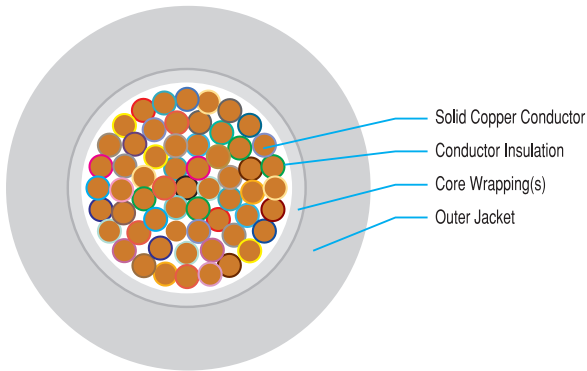

Features:

- Solid Annealed Bare Copper Conductor
- Dry Core
- Flame Retardant Jacket

Specification:

Capacity : 10 Pairs Upto 200 Pairs
 Conductor Dia. : 0.4, 0.5, 0.6 mm (26, 24, 22 AWG)
 Insulation Type : PVC
 Twisting Method : Pair or Quad
 Basic Units : 10 Pairs / 25 Pairs / 5 Quads
 Outer Jacket : PVC

Electrical Characteristics:

Conductor Resistance: 144 Ohm / km 0.4 mm
 89.5 Ohm/km 0.5 mm
 63 Ohm/km 0.6 mm
 Mutual Capacitance: 90 nF/km
 Insulation Resistance: 200 MOhm.km

Options:

- Tinned Copper Conductor
- Tinned Copper Drain Wire Conductor
- PE (Foam-skin or Solid) Insulation
- Aluminum Tape Shielded
- Mutual Capacitance Value may vary as per Customer Specification
- Halogen Free Flame Retardant (HFFR) Jacket

Standards: IEC 708 - (1-4), IEC 60332, ANSI / ICEA specification

